


คู่มือการ Config IP Phone

1. นำสาย Lan ต่อกับ Port Lan ของ IP Phone เช้าวง Network
2. Scan IP ผ่านโปรแกรมหรือ ตรวจสอบผ่าน Menu IP Phone



3. เมื่อกดเข้าสู่หัวข้อเมนูแล้วสามารถกดเช็ค IP ที่หัวข้อ Status >> Network status

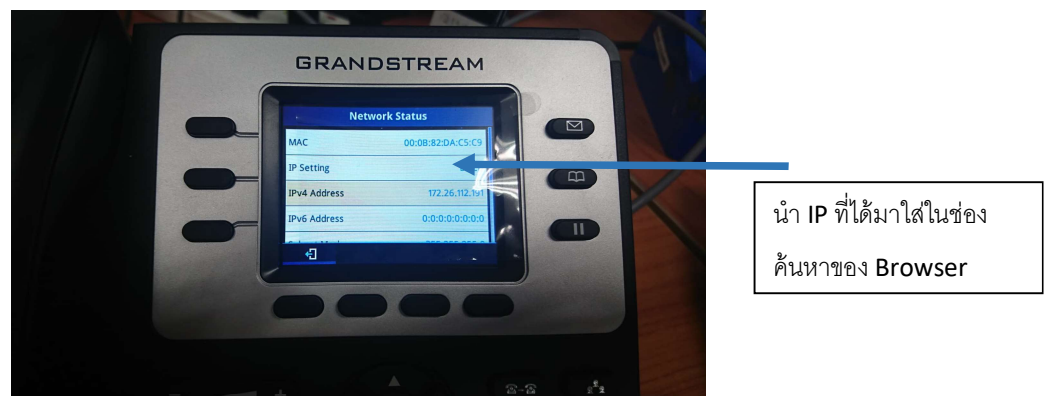

4. เมื่อกรอก IP จะเข้าสู่หน้า Manage web


*** ในการ Login ครั้งแรก Username/Password จะเป็น admin/admin

เมื่อ Login ได้แล้วระบบจะให้เปลี่ยน Password ในการเข้าใช้ครั้งต่อไป




Copyright © Grandstream Networks, Inc. 2018. All Rights Reserved.

5. เลือกหัวข้อ Account >>> Account 1 >>> General Settings

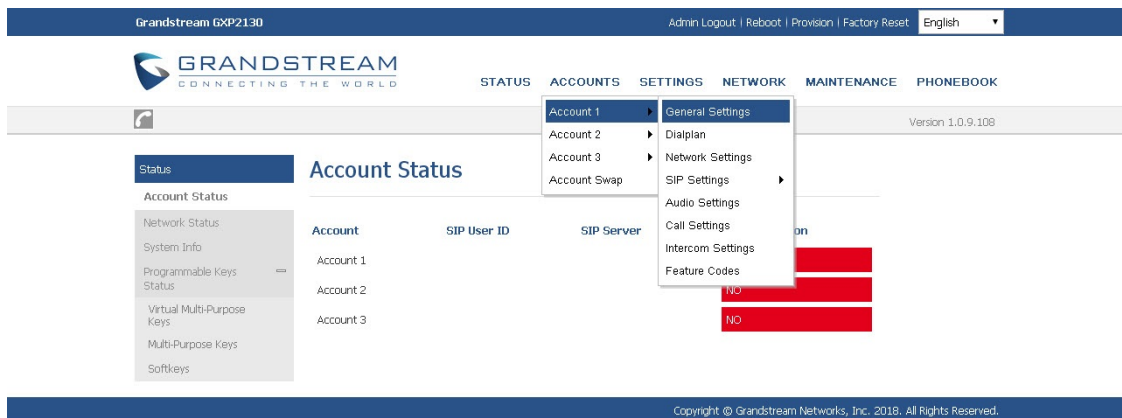

6. หน้า General Settings

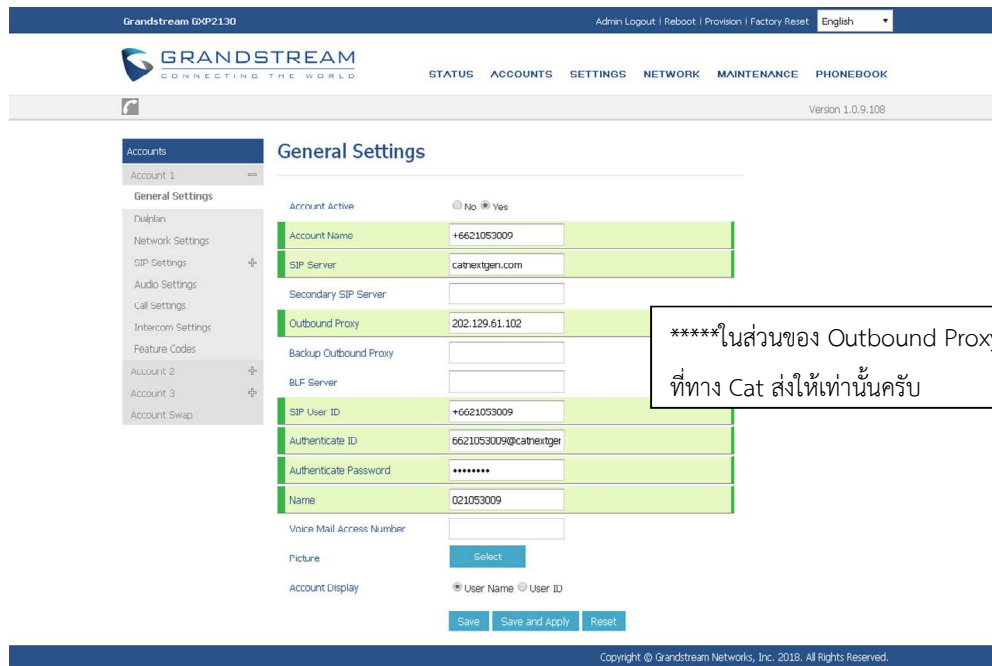


The screenshot shows the Grandstream GXP2130 web interface. The top navigation bar includes 'Grandstream GXP2130', 'Admin Logout | Reboot | Provision | Factory Reset', and a language dropdown set to 'English'. The main menu contains 'STATUS', 'ACCOUNTS', 'SETTINGS', 'NETWORK', 'MAINTENANCE', and 'PHONEBOOK'. The 'General Settings' page is displayed for 'Account 1'. The left sidebar lists various settings categories: 'General Settings', 'Dialplan', 'Network Settings', 'SIP Settings', 'Audio Settings', 'Call Settings', 'Intercom Settings', 'Feature Codes', 'Account 2', 'Account 3', and 'Account Swap'. The main content area shows the following settings:

- Account Active: No Yes
- Account Name: +6621053009
- SIP Server: catnextgen.com
- Secondary SIP Server: (empty)
- Outbound Proxy: 202.129.61.102
- Backup Outbound Proxy: (empty)
- BLF Server: (empty)
- SIP User ID: +6621053009
- Authenticate ID: 6621053009@catnextgen
- Authenticate Password: (masked with asterisks)
- Name: 021053009
- Voice Mail Access Number: (empty)
- Picture: Select
- Account Display: User Name User ID

Buttons at the bottom include 'Save', 'Save and Apply', and 'Reset'. A callout box on the right contains the text: "*****ในส่วนของ Outbound Proxy ให้ใส่ตามไฟล์แนบที่ทาง Cat ส่งให้เท่านั้นครับ". The footer shows 'Copyright © Grandstream Networks, Inc. 2018. All Rights Reserved.' and 'Version 1.0.9.108'.

7. หัวข้อ Audio Settings ปรับเลือก Codex เป็น PCMA หรือ G 729 เท่านั้น

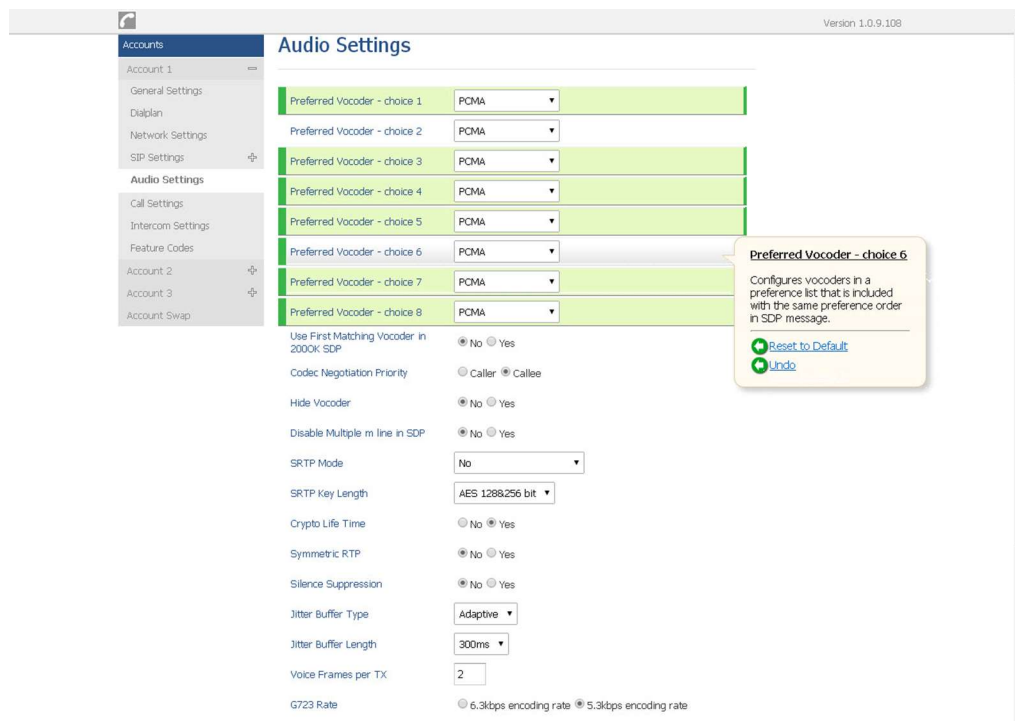


The screenshot shows the Grandstream GXP2130 web interface for 'Audio Settings'. The top navigation bar and main menu are consistent with the previous screenshot. The left sidebar highlights 'Audio Settings'. The main content area shows the following settings:

- Preferred Vocoder - choice 1: PCMA
- Preferred Vocoder - choice 2: PCMA
- Preferred Vocoder - choice 3: PCMA
- Preferred Vocoder - choice 4: PCMA
- Preferred Vocoder - choice 5: PCMA
- Preferred Vocoder - choice 6: PCMA
- Preferred Vocoder - choice 7: PCMA
- Preferred Vocoder - choice 8: PCMA
- Use First Matching Vocoder in 200K SDP: No Yes
- Codec Negotiation Priority: Caller Callee
- Hide Vocoder: No Yes
- Disable Multiple m line in SDP: No Yes
- SRTP Mode: No
- SRTP Key Length: AES 128/256 bit
- Crypto Life Time: No Yes
- Symmetric RTP: No Yes
- Silence Suppression: No Yes
- Jitter Buffer Type: Adaptive
- Jitter Buffer Length: 300ms
- Voice Frames per TX: 2
- G723 Rate: 6.3kbps encoding rate 5.3kbps encoding rate

A callout box for 'Preferred Vocoder - choice 6' contains the text: "Configures vocoders in a preference list that is included with the same preference order in SDP message." and buttons for 'Reset to Default' and 'Undo'. The footer shows 'Version 1.0.9.108'.

8. เมื่อตั้งค่าได้แล้วในหน้า Status ในช่องของช่อง Account จะเปลี่ยนเป็นสีเขียว โดยสามารถตรวจสอบการ Register ผ่านหัวเครื่องที่ Menu >> Status >> Account Status

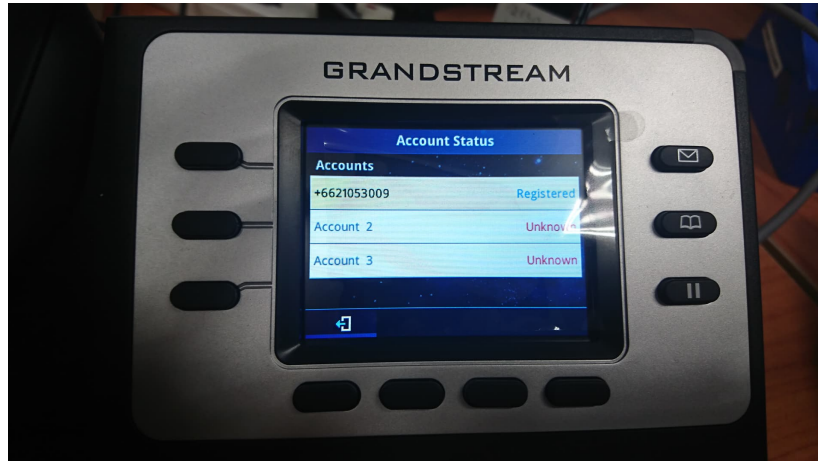

9. ส่วนของการ Reset Factory สามารถทำได้ที่ Menu >> System >> Factory Reset (ล่างสุด) กดยืนยัน ***แนะนำให้ถอนสาย Lan ออกก่อนทุกครั้ง

